Toggle to Push-Button Switch

Replacement and upgrade instructions

1 **Disconnect the old switch wires**
Disconnect the two switch wires inside the base.

2 **Attach a pull string**
Securely attach a 3-4-foot length of string or pull wire to the disconnected switch wires. This will be used to guide the new wires through the handle.

3 **Remove the toggle switch**
Pull the old switch, wires and attached string out of the handle. **Do not pull the string completely out.** Leave string at both ends, then detach the old wires. Remove the black plastic switch-to-handle adapter; the new switch does not need it.


4 **Pull the new wires through**
Securely attach all four new switch wires to the string. Gently pull from the base end to guide the wires down the handle. Remove the string once the wires are through.

5 **Secure the new switch**
Apply a small amount of silicone adhesive to help hold the switch in place. Keep adhesive away from the button mechanism and electrical connections.

6 **Connect the new switch**
Connect the four wires according to the diagram below. Secure and insulate all connections. Keep wires clear of pinch points when reassembling the base.

WIRING DIAGRAM

Gentoo schematic - Rev OD - October 2023

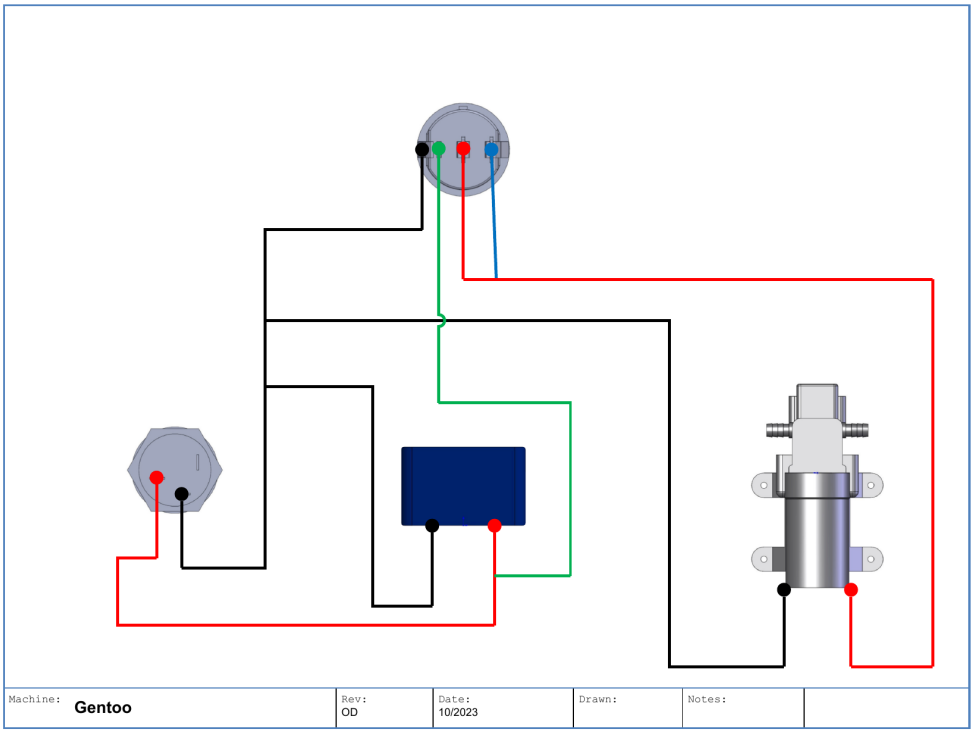

ORDER A NEW SWITCH

E-023 | Push Button 12V Green LED

Scan or click to order

UPGRADE YOUR BATTERY

Battery modification kit

Scan or click to order